

We test, you produce.


F26 SPEED

COMPACT LEAK TESTER FOR HIGH SPEED PRODUCTION

Without any doubt, the smallest high-performance leak tester on the market. Specially adapted for automatic and semi-automatic test machine, the **F26 Speed** has a full range of specifications at a very competitive price.

Highlights

- COMPACT
- TOUCHSCREEN PC UI
- EASY INTEGRATION

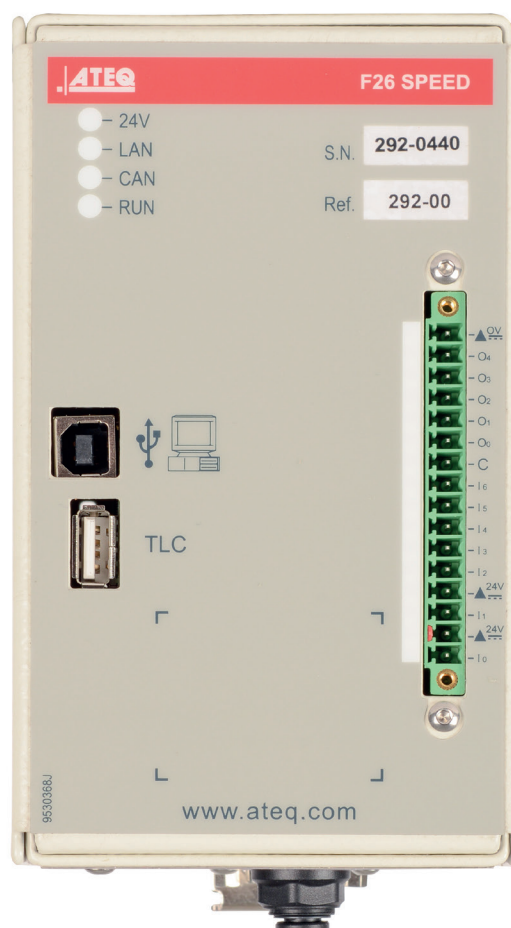

Applications

Blister, sachet, pneumatic and hydraulic fitting...



F26 SPEED

COMPACT LEAK TESTER FOR HIGH SPEED PRODUCTION

Gamme de mesure

Pressure	Accuracy	Max. Resolution	ΔP. Measurement	Accuracy	Max. Resolution
vacuum	± 2% of the full scale	1 mbar	500 Pa - 1000 Pa - 2000 Pa - 5 kPa	± 4% of the full scale	1 Pa - 10 Pa
-500/+500 mbar			500 Pa - 1000 Pa - 2000 Pa - 5 kPa		1 Pa - 10 Pa
0 - 500 mbar			500 Pa - 1000 Pa - 2000 Pa		1 Pa
0 - 2 bar		10 mbar	1000 Pa - 2000 Pa - 5 kPa - 10 kPa		1 Pa - 10 Pa
0 - 5 bar			2000 Pa - 5 kPa - 10 kPa - 20 kPa		1 Pa - 10 Pa
0 - 10 bar			5 kPa - 10 kPa - 20 kPa - 50 kPa		10 Pa
MECHANICAL PRESSURE REGULATOR (OPTIONAL) OUT OF THE INSTRUMENT Vacuum - 500 mbar - 5 bar - 9 bar					



Main Features

- Leak testing by pressure drop (until 10 bar)
- Measurement ranges : (ΔP) P.E.: 500 Pa to 50 kPa
- 8 programs
- Networking several modules (via CAN)
- Set up on line via USB port
- Compact enclosure
- Flexible mounting styles
- Integrated fill and dump valves
- Flexible communication formats : RS232, USB, Ethernet (For printer and PC)
- Environment : ROHS standard (Restriction of the use of certain Hazardous Substances)


Technical specifications

Temperature	Operating: + 10°C to + 45°C Storage: 0°C to + 60°C
Interface	Cycle in progress CAN - Ethernet - 24 V
Weight	Approximately 1.5 Kg
Physical	Dimensions (WxHxD) 88x163x85 mm
Air supply	Clean and dry air required Air quality standard to be applied (ISO 8573-1)
External power supply	24 V DC - 1.6A Main power supply 110 - 230 V AC supplied

→ **THE FASTEST:**
(Part volume of 1 cm³ and test pressure 2 bar)
Test cycle = 0,02 sec

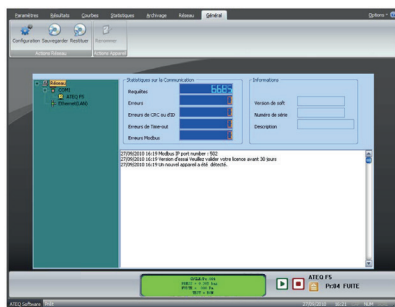

Software

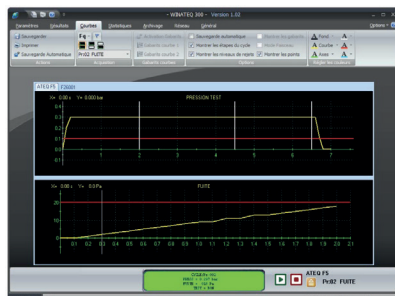

Accessories

- ATEQ software
 - Printer
 - Modem
 - Leak flow calibrator
 - Set up on line
 - Leak jets
 - Filtration kit
 - Connectors
- Please refer to ATEQ accessories list



CDF 60 :
LEAK FLOW
CALIBRATOR



Connectors



ATEQ Canada Inc.
4-2355 Royal Windsor Drive Mississauga ON L5J 4S8 Canada
T.: +1 (905) 569-1813 - F.: +1 (905) 569-1813 - info@ateq.ca - ateq.ca

