

We test, You produce

# F600 HP

## HIGH PRESSURE COMPACT LEAK DETECTOR FOR PRODUCTION TESTING

Without any doubt the smallest high pressure leak detector on the market. The **F600 HP** is equipped with the technical innovations of the 6 series and allows high pressure leak testing at a very competitive price.

### BENEFITS

- TEST PRESSURE: UP TO 200 bar
- COMPACT FORMAT
- EXCELLENT VALUE
- SIMPLIFIED SETUP



### Applications

Catheters, refrigeration parts, oil radiators, HP tubes and pipes, valves, hydraulic brakes...



# F600 HP

## HIGH PRESSURE COMPACT LEAK DETECTOR FOR PRODUCTION TESTING

### Measurement Ranges

Pressure Range	Measurement range	Accuracy
5 MPa Max (50 bar)	0.01 to 5.00 kPa	+/- 1.0% Rdg + 1% FS
10 MPa Max (100 bar)	0.01 to 10.00 kPa	
2 to 20 MPa 20 to 200 bar	0.01 to 50.00 kPa	
	0.01 to 100.00 kPa	
	0.1 to 500.0 kPa	
	0.1 to 1000.0 kPa	

Measurement range: From 10 % to 100 % of the full scale.

### Main Features

- Pressure decay leak testing from 5 to 1000 kPa
- Range of measurement from 20 to 200 bar
- 128 programs
- Mechanical regulation 5 MPa/ 10 MPa/ 17.0 MPa/ 20.6 MPa
- Electronic regulation 4 MPa / 5 MPa

### Environment

- ROHS standard

### Test Modes

- Flow units (mm<sup>3</sup>/s, cm<sup>3</sup>/s, cm<sup>3</sup>/min, cm<sup>3</sup>/h...)
- Desensitized Test and others, depending on your applications

### Flexible Communication format

- RS232: printer, modbus RTU
- Slave USB: PC supervision (WinAteq 300, sesame)
- Master USB: USB key to transfert (parameters, results, ...)
- 6 inputs/ 6 outputs 24 V programmable for external automation

### Technical Specifications


Physical	Weight: 7 kg Dimensions: (WxHxD) 250 x 150 x 360 mm
Interface	Graphic color screen with simple and intuitive menu-driven operator controls SMART KEY: programmable key with user's functions
Electrical supply	24VDC/2A or 100-240VAC/50W
Air supply	Command 4/6 bar Pressure 1 or 2 bar > test pressure Clean and dry air Air quality standard to be applied (ISO 8573-1)
Temperature	Operating: +5°C to +45°C Storage: 0°C to +60°C

### Accessories

- Start/Reset remote control
  - Printer
  - Filtration kit
- Please refer to ATEQ accessories list



TLC 600  
Remote control

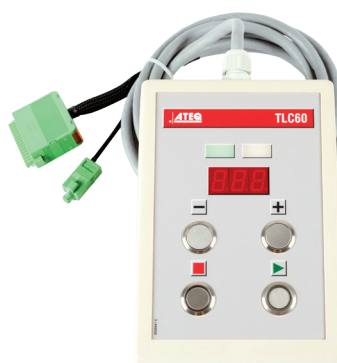

TLC 60  
Remote control

