

MS-40GT LEAK TEST INSTRUMENT FOR ADVANCED LEAK METROLOGY

The **MS Series** of leak detectors represent the world's largest base of installed leak detectors which are fully automatic, easy to use, and highly accurate, these advanced design leak detectors are ideal for a broad range of applications including clean, oil-free testing.

Breakthrough technology combines high test port pressure, a large capacity internal vacuum pump, and ATEQ's unique mass spectrometer making the MS series leak detectors at least four times faster than conventional portable units available today.

BENEFITS

- Maximum performance
- Touch screen graphical display
- Available with wet or dry pumping package



Applications

Aerospace Components, Air Conditioning and Refrigeration Systems, Automotive Components and Appliances, Batteries, Electron Beam Welders, Electronics, Food Packaging, Hermetically Sealed Devices, Medical Products, Particle Accelerators, Pharmaceuticals, Power Distribution Plants, Semiconductors, Sputtering Equipment, Vacuum Systems, Valves...



MS-40GT

LEAK TEST INSTRUMENT

FOR ADVANCED LEAK METROLOGY

Measurement characteristics

- Sensitivity: 4×10^{-11} atm cc/sec in direct mode, Sensitivity: 4×10^{-10} atm cc/sec in reverse mode
- Sensitivity: 5×10^{-7} atm-cc/sec in sniff mode
- Time To Test: 1.5 seconds on a blank test port
- Response Time: Direct Mode <2 seconds, Reverse Mode <3 seconds
- Leak Range: 1×10^{-3} to 4×10^{-11} (10 to 4×10^{-11} atm cc/sec w/ext pump)
- Resolution: resolving power of 14 at mass 4
- Maximum Inlet Pressure: atmosphere in Gross (with dedicated external roughing pump), 7.5 Torr in Fine
- Start Up Time: < 3 minutes
- Testable Masses: He 3 and He 4

Options


- Handheld remote control unit with 25' or 50' cord
- External roughing kit, w/valving and manifolding and pump
- Mobile cart
- Mini Sniffer Probe
- Hard travel case

Accessories

- Calibrated Gas Leaks
- Helium Bombing Station
- Connectors...

Other Formats

- MS-40GT Wet Pumping Package
- MS-40GT Dry Pumping Package
- MS-40 Dry Clean Room Compliant
- MS-40 GT Plus Package with external wet or dry pumping package
- MS-50 GT Console Units featuring wet, dry, high sensitivity, dual port, UFT or argon configurations

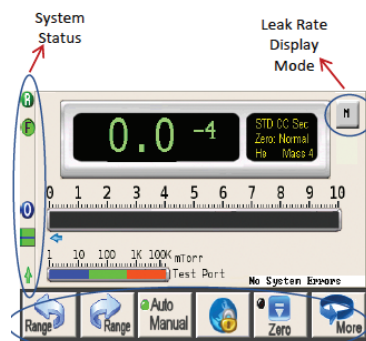

Touch-Screen Graphical User Interface

Navigation Buttons

Main Features

- Simple one-button start up
- Fully automatic operation, tuning and calibration with internal NIST traceable temperature compensated calibrator
- Three modes of operation in a single unit
- Built-in diagnostics for trouble-free maintenance
- Dual magnetic sector mass spectrometer with resolving power of 14
- Allows testing for the smallest leaks at the highest pressures
- Ready to test in under three minutes
- Reduces operator training: easy to use
- Auto-zeroing with continuous background compensation
- Rotary vane and dry pumps available
- Faster, more accurate testing

Test Modes

- Flow Units: std cc/sec, mbar L/sec, Pa m³/sec
- Pressure Units: mTorr, mBar, Pa
- Leak Ranging: automatic and manual
- Testing Modes: Gross, Reverse, Direct, Combination, Sniff

Flexible Communication format

- Full duplex RS232 communication
- Parallel Printer Port
- Chart Recorder Output
- Audio Output
- Remote Output
- Option Data Link Software

Technical Specifications

Weight	39.5 Kg - 87.08 lbs wet unit 43.6 Kg - 96.12 lbs dry unit
Physical	Dimensions: (W x H xD): 20.5 x 15 x 14 inch 52.7 x 38.1 x 35.6 cm
Interface	Touch Screen Graphical User Controls
Electrical supply	115/50-60/8; 230-240/50-60/5; 100/50-60/8 (V/Hz/A)
Temperature	Operating: 32F to 115F / + 0°C to + 46°C Storage: 32F to 140F / + 0°C to + 60°C

